

Commercial Door Manufacturing, Inc.


2914 Girard NE, Albuquerque, NM 87107

CommercialDoorMfg.com


505-881-1034

(fax) 505-884-1484


Door Elevations




F




V1




G1



S1




G21




L1


	ELEV	W	H	FH	ELEV	LS	TS	H	ELEV	LS	TS	W	H	ELEV	LS	TS	H	ELEV	W	H	BD	TYPE
	V1				G1				S1					G21				L1				
	V2				G2				S2									L2				
	V3				G3				S3									L3				
	V4				G4				S4									L4				
	V5				G5				S5									L5				
	V6				G6				S6									L6				
	V7				G7				S7									L7				
	V8				G8				S8									L8				
	V9				G9				S9									L9				




DD

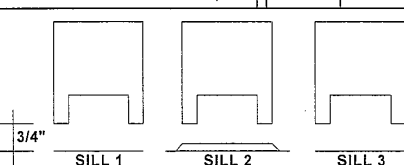


SILL 1 SILL 2 SILL 3



LOUVERS
Y TYPE



ASTRAGAL
12 GA. X 1 1/2\"



DOOR EDGE CONSTRUCTION
MECHANICAL INTERLOCK-SEAMED OR SEAMLESS SEE COVER SHEET
CONTINUOUSLY WELDED, GROUND SMOOTH - BUTT EDGE - SEAMLESS


NOTE: DOOR GLASS SIZES ARE NET VISUAL AREA, TYPICAL. FIELD MEASURE FOR GLAZING

HOLLOW METAL DOOR ELEVATIONS

GA	DOOR REINFORCEMENT	DOOR REINFORCEMENT	MISCELLANEOUS
3/16"	HINGE	HONEYCOMB	* ALL GLASS DIMENSIONS ARE NET VISUAL AREAS, TYPICAL
12	LOCK	POLYSTYRENE	* CLEARANCES = 1/8" BETWEEN PAIRS. 1/8" AT JAMBS AND HEADS
12	CLOSER	STEEL RIB / GA. (INSULATED)	* FOR PAIR OF DOORS USE PREFIX '2' (I.E. 2F, 2V1, 2L1, ETC.)

GA	DOOR FACE SHEETS	DOOR EDGE	DOOR SERIES
16	EXTERIOR	SEAMED	BUTT EDGE
16	INTERIOR	SEAMLESS	MECH INTERLOCK
GRAY	PRIME COAT		

NOTE:
ALL DIMENSIONS ON THIS SHEET ARE IN INCHES.



DOOR - FLUSH TOP CAP
EXTERIOR DOORS TYPICAL

PROJECT:
ARCHITECT:
CONTRACTOR:
PROJECT NO:
DATE:
SHEET:
DOOR ELEVATIONS / SPECIFICATIONS