

Storage


HMMA Storage and Installation Information

COMMERCIAL DOOR & HARDWARE, INC.
 2914 Girard NE Albuquerque, NM 87107
 Phone: 505-881-1034 Fax: 505-884-1484

Recommended Storage

The contractor responsible for installation shall remove wraps or covers from doors and frames upon delivery at the building site. The contractor shall see that any scratches or disfigurements caused in shipping or handling are promptly cleaned and touched up with a rust-inhibitive primer.

The contractor responsible for installation shall see that materials are properly stored on planks or dunnage in a dry location. Doors shall be stored in a vertical position and spaced by blocking. Materials shall be covered to protect them from damage, but in such a manner as to permit air circulation.

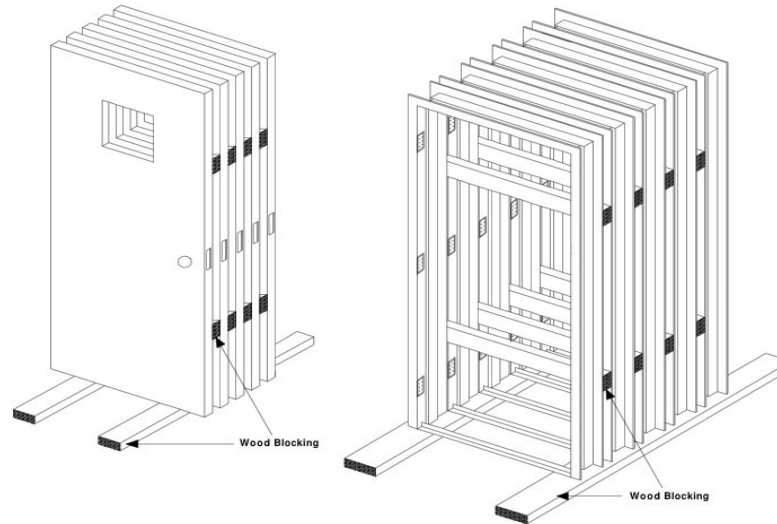

Guide Lines For Onsite Storage

1. Store doors and frames under cover to protect from elements.
2. Remove any cardboard wrappers from doors and frames to prevent moisture entrapment.
3. Stack doors and frames on skids to elevate above any standing water.
4. Place wood spacers between doors and frames to allow for air circulation.
5. Limit stack to 5 doors or single frames. Elevation frames should not be stacked.

Failure to follow these instructions may result in the voiding of any and all warranties.

Contact NAAMM for the Hollow Metal Manual and Complete Guide Specifications

Installation Tolerances

